



Centrul Vehicule Comerciale

Solutii specializate
transport marfuri perisabile





IVECO Daily

Motorizare 100,120,150,180 CP

3.5T – 6.5T sarcina totala

0.9T – 3.5T sarcina utila

12mc – 19 mc volum util

Optionale suprastructura

- Usa laterala suplimentara
- Carlige ancorare
- Lift

FRIGOBX LITE

FRIGOBX EXTRA

Putere agregat recomandat:

| | |
|------------|----------------|
| 0 grade: | 12-14 mc 2000W |
| | 14-19 mc 3000W |
| -20 grade: | 12-14 mc 3000W |
| | 14-19 mc 3500W |

Optionale agregat:

- Actionare electrica
- Inalzire
- Sistem inregistrare temperatura si imprimanta
- GPS



FRIGOBX ALPINE

FRIGOBX ALASKA

Fiat Ducato

Motorizare 120 CP

3.5T - 4T totala

0.9T - 1.5T sarcina utila

12mc - 19 mc volum util

Optionale suprastructura

- Usa laterala suplimentara
- Carlige ancorare
- Lift

FRIGOBIX LIFE

FRIGOBIX ALAXA



Putere agregat recomandat:

0 grade: 12-14 mc 2000W
14-19 mc 3000W

-20 grade: 12-14 mc 3000W
14-19 mc 3500W

Optionale agregat:

- Actionare electrica
- Incalzire
- Sistem inregistrare temperatura si imprimanta GPS





FRIGOBX ALPINE

IVECO EuroCargo

Motorizare 150, 180, 220, 250 CP


7.5T – 18T sarcina totala

3.5T – 311T sarcina utila

18mc – 44 mc volum util

Optionale suprastructura

- Usi laterale suplimentara
- Carlige ancorare
- Lift
- Rafturi interioare

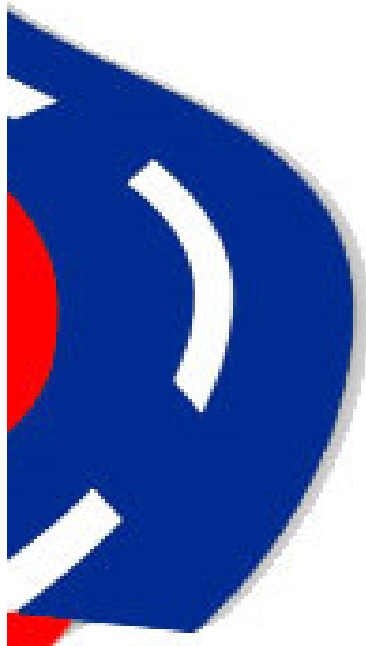

Putere agregat recomandat:

- | | |
|------------|-----------------------------|
| 0 grade: | 18-28 mc 3500W |
| | 28-40 mc 6000W |
| | 40-44 mc 7500W motor diesel |
| -20 grade: | 18-28 mc 5000W |
| | 28-32 mc 36500W |
| | 32-42 mc 7500W motor diesel |

Optionale agregat:

- Actionare electrica
- Incalzire
- Sistem inregistrare temperatura si imprimanta
- GPS

FRIGOBX ALASKA



IVECO Stralis

Motorizare 260 - 500 CP

26T – 44T sarcina totala
Peste 40 mc volum util
Optional: Axa liftanata

Optionale suprastructura

- Usi laterale suplimentara
- Carlige ancorare
- Lift
- Rafturi interioare



FRIGOBIX ALPINE

Putere agregat recomandat (motor diesel):

0 grade: 44 -64mc 8000W
64-88 mc 10000W

-20 grade: 32-42 mc 7500W
42-55 mc 8500W
55-75 mc 1000W

Optionale agregat:

- Sctionare electrica
- Incalzire
- Sistem inregistrare temperatura si imprimanta
- GPS



FRIGOBIX ALAXA

IZOTERMARI VEHICULE COMERCIALE (Refrigerare si congelare)



Fiat Scudo : volum 4-6 mc

Putere agregat recomandat:

| | |
|------------|-----------------------|
| 0 grade: | 2-6 mc 1000W electric |
| | 6-15 mc 1500W |
| -20 grade: | 2-6 mc 1500W |
| | 6-12 mc 2000W |
| | 12-17 mc 3000W |



Iveco Daily: volum 12-17 mc

FRIGOVAN ALASKA

Optionale agregat:

- Actionare electrica
- Incalzire
- Sistem inregistrare temperatura si imprimanta
- GPS

FRIGOBUX LIFE



Fiat Ducato : volum 9-17 mc



Fiat Doblo :volum 2-4 mc



FRIGOZONE

Optionale: Rafturi, carlige de ancorare, usi laterale

Toate suprastructurile indeplinesc normele ATP pentru transport alimente

Poadea speciala antiderapanta cu grad mare de frictiune

| Produs | °C |
|----------------------------|-----------|
| Peste congelat | -20 |
| Inghetata | -18 / -20 |
| Fructe si legume congelate | -18 / -20 |
| Pui congelat | -12 |
| Miel, congelat | -10 |
| Oaie, congelat | -10 |
| Vaca, congelat | -10 |
| Porc, congelat | -10 |
| Jambon, Sunca, congelat | -10 |
| Pui, proaspat | -1 / 4 |
| Carne de vaca, peste | -1 / 7 |
| Slanina | -1 / 7 |
| Ceapa | -1 / 20 |
| Peste proaspat | 0 / 2 |
| Ciuperci | 0 / 2 |
| Miel, proaspat | 0 / 4 |
| Oaie, proaspat | 0 / 4 |
| Vitel, proaspat | 0 / 4 |
| Porc, proaspat | 0 / 4 |
| Sunca, proaspat | 0 / 4 |
| Smantana si frisca | 0 / 4 |
| Cirese | 0 / 4 |
| Prumb | 0 / 4 |
| Branza | 0 / 5 |
| Asparagus | 0 / 5 |
| Fructe de mare | 0 / 5 |
| Gutui | 0 / 5 |
| Pere | 0 / 5 |
| Peas, green | 0 / 5 |
| Lapte | 0 / 6 |
| Spanac | 0 / 6 |
| Piersici | 0 / 7 |
| Prune | 0 / 7 |
| Sfecla | 0 / 8 |


| Produs | °C |
|------------------|---------|
| Brocoli | 0 / 8 |
| Morcovi | 0 / 8 |
| Conopida | 0 / 8 |
| Telina | 0 / 8 |
| Spanac | 0 / 8 |
| Alte legume | 0 / 8 |
| Portocale | 0 / 8 |
| Zmeura | 0 / 8 |
| Stuguri | 0 / 8 |
| Curmale crude | 0 / 8 |
| Varza | 0 / 10 |
| Oua proaspere | 0 / 15 |
| Fructe de padure | 2 / 6 |
| Drojdie | 3 / 6 |
| Prajituri | 3 / 6 |
| Mere | 3 / 10 |
| Rosii | 4 / 8 |
| Turnips | 4 / 8 |
| Salam | 4 / 8 |
| Pepene | 4 / 10 |
| Menta | 5 / 8 |
| Fasole Verde | 5 / 8 |
| Grapefruit | 5 / 10 |
| Flori | 5 / 10 |
| Miere | 5 / 10 |
| Cartofi | 5 / 15 |
| Unt | 6 |
| Margarina | 6 |
| Peste afumat | 10 |
| Ananas | 10 / 12 |
| Dovleac | 10 / 15 |
| Castraveti | 10 / 15 |
| Lards | 12 |
| Banane | 12 / 14 |
| Lamii | 12 / 15 |



| KIT | Destinatie | | mm | Dimensiuni |
|--|---------------------------------------|-----------------------------|-------|----------------------------|
| FrigoVanAlpine k=0.5 | -10 grade | podea | 60 | Volum VAN maximum 17 mc |
| | | pereti | 40 | |
| | | usi | 40 | |
| | | acoperis | 40 | |
| FRIGOVAN ALPINE | | | | |
| FrigoVanAlaska k=0.4 | -20 grade | podea | 60 | Volum VAN maximum 17 mc |
| | | pereti | 50 | |
| | | usi | 40 | |
| | | acoperis | 50 | |
| FRIGOVAN ALASKA | | | | |
| FrigoBoxLite greutate 575 kg k=0.7 | 0-4 grade, 3.5Tone Sasiu aluminium | podea+perete frontal | 80 | Dimensiuni carosare maxime |
| | | pereti | 45 | L=8080 |
| | | usi | 45 | l=2550 |
| | | acoperis | 80 | H=2496 |
| FRIGOBOX LITE | | | | |
| FrigoBoxAlaska k=0.3 | -20 grade | podea+perete frontal | 100 | Dimensiuni carosare maxime |
| | | pereti (daily 80, cargo 60) | 60-80 | L=8200 |
| | | usi | 60-80 | l=2600 |
| | | acoperis | 100 | H=2600 |
| FRIGOBOX ALASKA | | | | |
| FrigoBoxAlpine k=0.4 | -10...+12 grade | podea+perete frontal | 100 | Dimensiuni carosare maxime |
| | | pereti (daily 60, cargo 50) | 50-60 | L=8300 |
| | | usi | 50-60 | l=2680 |
| | | acoperis | 80 | H=2600 |
| FRIGOBOX ALPINE | | | | |
| FrigoBoxExtra K=0.3 pentru 3.5T, se scad 10% din dimensiuni | -25 grade | podea+perete frontal | 120 | Dimensiuni carosare maxime |
| | | pereti | 85 | L=5000 |
| | | usi | 85 | l=2644 |
| | | acoperis | 115 | H=2600 |
| FRIGOBOX EXTRA | | | | |

Norme ATP si Clasificari:

| Izolare | | IN | Normal Izolat , k <0.7 | K recomandat | Temp |
|------------|---------|-----|----------------------------------|--------------|---------|
| | | IR | Heavy izolat , k<0.4 | | |
| Izolare cu | Class A | FNA | Normal Izolat 0 +12, k <0.7 | 0.7 | 0 +12 |
| agregat | Class A | FRA | Heavy Izolat for 0 +12, k<0.7 | 0.5 | 0 +12 |
| | Class B | FRB | Heavy Izolat for +10 - 12, k<0.4 | 0.4 | -10 +12 |
| | Class C | FNC | Heavy Izolat +12 - 20 , k <0.4 | 0.32 | -20 +12 |



FRIGOZONE

Contact:

www.cvc.ro

iasi@cvc.ro

Tel: 0232-234005

- Carosare
- Instalare sistem frigorific
- Intretinere vehicul, structura si agregat
- Finantare
- Omologare
- Livrare

- Inchirieri vehicule frigorifice si masina la schimb
- Contract de intretinere globala